

BIG LEDUP 1000 x 2480 and 1000 x 2980



Stand 15. Februar 2022

BIG LEDUP 1000 x 2480 and 1000 x 2980

Print Data Specifications

- PDF/X-1a:2001 Standard (PDF-Version 1.3)
- Print Data Scale 1:1 or 1:10 anlegen

- Total Area (scale 1:1) with **20mm Bleed**:

BIG LEDUP 1000x2480: **1040x2520 mm (width x height)**
BIG LEDUP 1000x2980: **1040x3020 mm (width x height)**

- No registration and no crop marks
- Recommendet resolution at least
72 dpi (scale 1:1)
720 dpi (scale 1:10)
- CMYK-colors only, no special colors
Color-Profile: Fogra39
- Fonts must be converted into path

Notice

1. Recommendet black for backlit: CMYK 100/100/50/100

File Transfer

- Up to 25 MB by E-Mail to grafik@x-cite.com, please provide your order-number („Vorgangsnummer“)
- Up to 2GB ny WeTransfer (<https://x-cite.wetransfer.com>), please provide your order-number („Vorgangsnummer“)
- Up to 2GB by FTP


Reprints

Due to the aging process of existing prints, colors may differ to the reprints. This is technically not avoidable and no reason for complaints.

Revision 15. February 2022

BIG LEDUP 1000 x 2480 and 1000 x 2980

Layout LEDUP 1000 x 2480

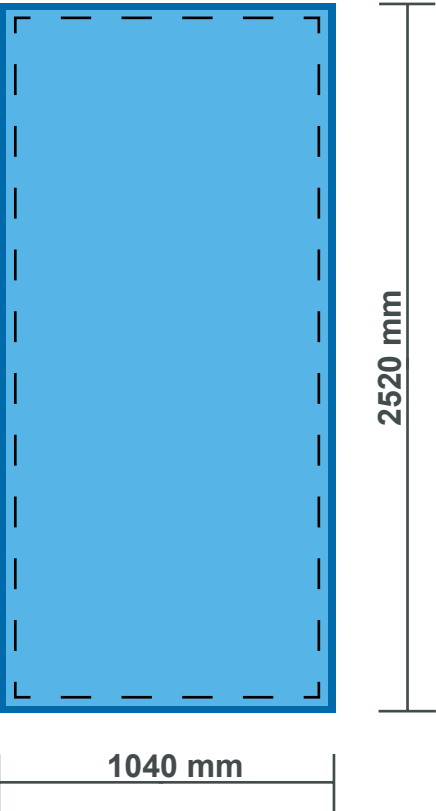

-  Safe viewable area: 960 x 2440 mm (width x height)
-  Final area: 1000 x 2480 mm (width x height)
-  File dimensions with 20mm bleed: 1040 x 2520 mm (width x height)

Total file dimensions of the print file with 20mm bleed:
1040 x 2520 mm (width x height)


Notice:

This template is not set to scale.

Revision 15. February 2022

BIG LEDUP 1000 x 2480 and 1000 x 2980

Layout LEDUP 1000 x 2980

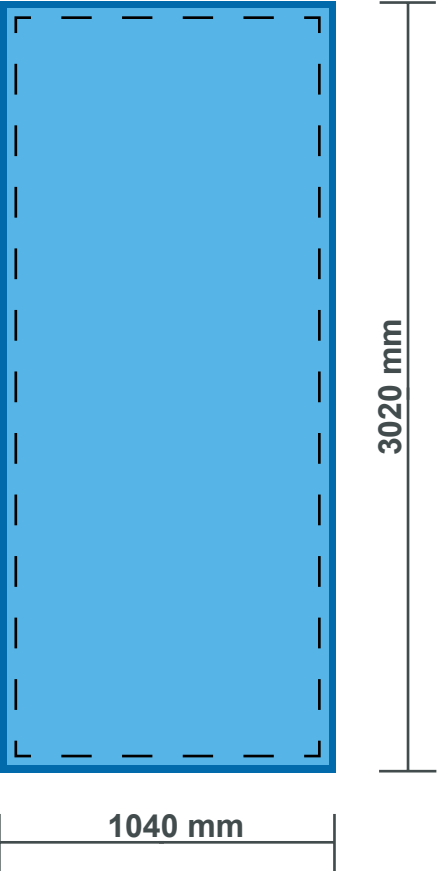

- Safe viewable area: 960 x 2940 mm (width x height)
- Final area: 1000 x 2980 mm (width x height)
- File dimensions with 20mm bleed: 1040 x 3020 mm (width x height)

Total file dimensions of the print file with 20mm bleed:
1040 x 3020 mm (width x height)

Hinweis:

Diese Schablone ist nicht maßstabsgetreu.

Revision 15. February 2022

BIG LEDUP 1000 x 2480 and 1000 x 2980

Any further questions?

Contact us monday till friday from 9am till 5pm.



X-CITE Werbesysteme GmbH
Gwinnerstr. 40 - 46
D-60388 Frankfurt am Main

Tel.: +49 (0) 69 150 49 30 - 00
Fax: +49 (0) 69 150 49 30 - 29
E-Mail: sales@x-cite.com



Revision 15. February 2022