

BIG LEDUP 3000 x 2480 and 3000 x 2980



Stand 10. März 2022

BIG LEDUP 3000 x 2480 and 3000 x 2980

Druckdatenvorgaben

Verwenden Sie den PDF/X-1a:2001 Standard mit den folgenden Anpassungen:

- Druckdatei im Maßstab 1:1 oder 1:10 anlegen
- 1:1 Datenmaß, mit **20mm Beschnitt**:

BIG LEDUP 3000x2480: 3040x2520 mm (BxH)
BIG LEDUP 3000x2980: 3040x3020 mm (BxH)
- Bitte verwenden Sie **keine** Schnitt- oder Passermarken
- Auflösung mindestens
100 dpi beim Maßstab 1:1
1000 dpi beim Maßstab 1:10
- CMYK-Farben, keine Sonderfarben
Farbprofil: ISOCoated_v2
- Schriften in Pfade umwandeln oder im PDF einbetten

Notice

1. Recommendet black for backlit: CMYK 100/100/50/100

File Transfer

- Up to 25 MB by E-Mail to grafik@x-cite.com, please provide your order-number („Vorgangsnummer“)
- Up to 2GB ny WeTransfer (<https://x-cite.wetransfer.com>), please provide your order-number („Vorgangsnummer“)
- Up to 2GB by FTP


Reprints

Due to the aging process of existing prints, colors may differ to the reprints. This is technically not avoidable and no reason for complaints.

Revision 10. March 2022

BIG LEDUP 3000 x 2480 and 3000 x 2980


Layout LEDUP 3000 x 2480

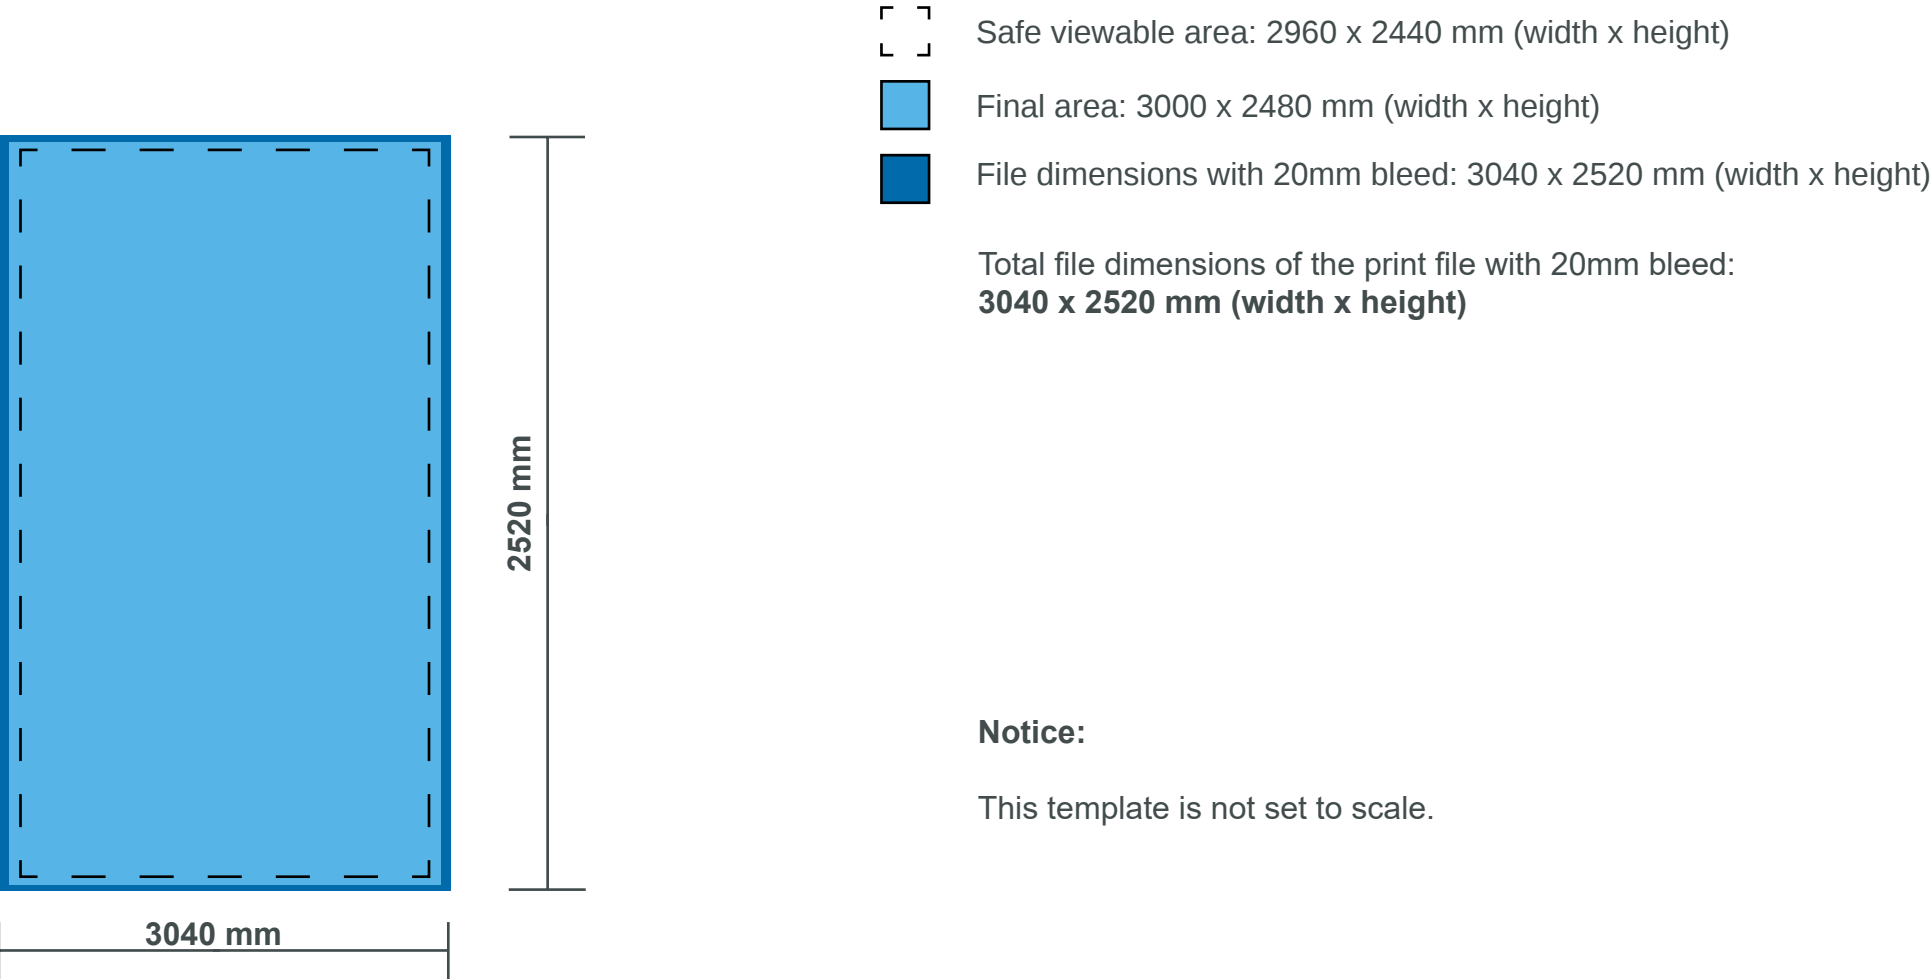

Revision 10. March 2022

BIG LEDUP 3000 x 2480 and 3000 x 2980

Layout LEDUP 3000 x 2980

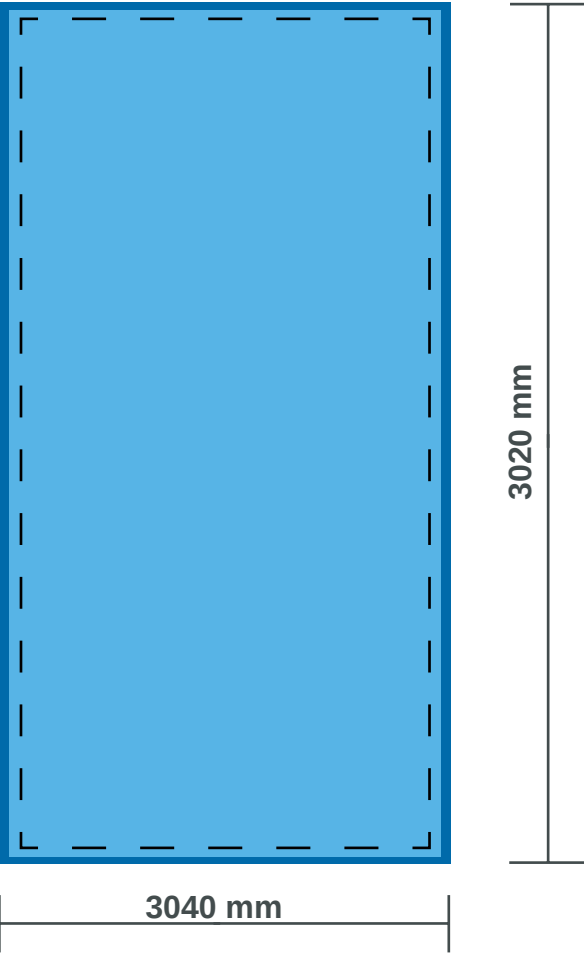

-  Safe viewable area: 2960 x 2940 mm (width x height)
 -  Final area: 3000 x 2980 mm (width x height)
 -  File dimensions with 20mm bleed: 3040 x 3020 mm (width x height)
- Total file dimensions of the print file with 20mm bleed:
3040 x 3020 mm (width x height)

Notice:

This template is not set to scale.

Revision 10. March 2022

BIG LEDUP 3000 x 2480 and 3000 x 2980

Any further questions?

Contact us monday till friday from 9am till 5pm.



X-CITE Werbesysteme GmbH
Gwinnerstr. 40 - 46
D-60388 Frankfurt am Main

Tel.: +49 (0) 69 150 49 30 - 00
Fax: +49 (0) 69 150 49 30 - 29

E-Mail: sales@x-cite.com



Revision 10. March 2022