


90W AC-DC ADAPTOR



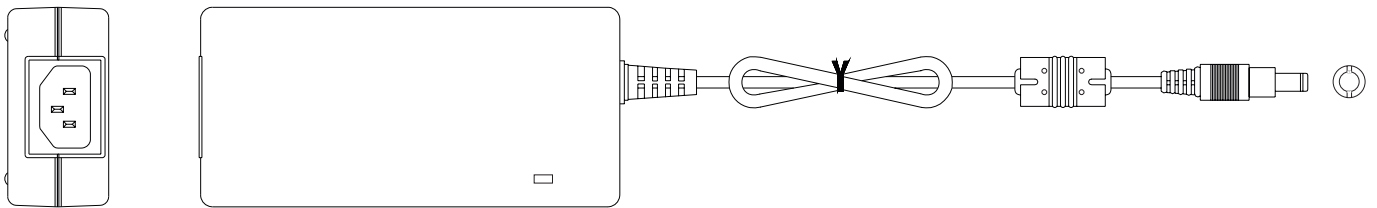

- Global certificates
- Universal AC input / Full range
- 3 pole AC inlet IEC320-C14, Class 1 power unit
- Built-in active PFC function
- No load power consumption <0.15W
- Energy efficiency Level VI
- Comply with EISA 2007/DoE, NRCAN, Korea K-MEPS, AU/NZ MEPS; EU ErP and CoC Version 5
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fully enclosed plastic case
- -30 ~ +70°C wide range working temperature
- LED indicator for power on
- 3 years warranty

SAFETY MODEL NO.
GST90A24

DC VOLTAGE
24 V

RATED CURRENT
3.75 A

CURRENT RANGE
0 ~ 3.75 A

RATED POWER (max.)
90 W

VOLTAGE RANGE
90 ~ 264 VAC 127 ~ 370 VDC

SAFETY STANDARDS
UL60950-1
CSA C22.2
TUV EN60950-1
BSMI CNS14336
CCC GB4943
PSE J60950-1

EMC EMISSION
EN55022 class B
EN61000-3-2
FCC PART 15 / CISPR22 class B
CNS13438 class B
GB9254
GB17625.1

DIMENSION
145 × 60 × 32 mm

PLUG ASSIGNMENT
P1M